



GENERAL WATER BATH

General Features


- Compact and economic model
- Simple design and CE Certificate approved
- With Flat lid(Standard accessory)

Specification

Model	KBLee 2001
Temp. range	Ambient +5°C to 100°C
Temp. accuracy	±0.1°C at 37°C
Temp. controller	Micoro-based PID Controller
Speed range	None
Speed controller	None
Rotation system	None
Dimension(out)	330 x 350 x 230 mm
Dimension(in)	240 x 300 x 150 mm
Volume	10.8Liters
Rack	None
Power	110/220V, 50/60Hz



KBLee 2001

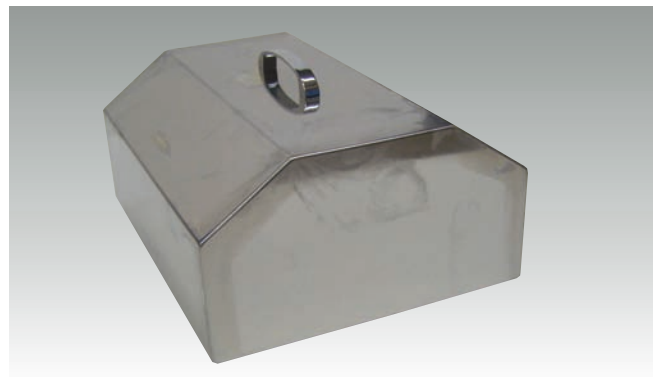

KBLee 2001 Optional Lid



KBLee2001 Controller

! Spring wire rack (Optional accessory)
For high temperature, The cover is provided optionally.

MULTI STIRRER



DK-MS 020



DK-MS 020 Controller

General Features

- Independent speed On/Off solid state control switch.
- Quiet brushless DC motor and superior durability.

Specification

Model	DK-MS 020
Speed Range	30-1500 RPM
Stirring Position	4EA
Dimension	280 x 300 x 90(H) mm
Power	110/220V, 50/60Hz